



SWEET BARS

WOW

SB
11,6x11,6cm / 4.6"x4.6"

P **\$** W32 (Matt & White Gloss)
W41 (Gloss)



SB White Gloss



SB Turques Gloss




SB Honey Gloss



SB Olive Gloss



SB Teal Gloss



SB Indigo Gloss



SB Biscuit Matt



SB Tan Matt



SB Tan Matt
SB Turques Gloss

SB
12,5x25 cm / 5"x10"

W W32



SB White Matt



SB Sand Matt




SB Grey Matt



SB Blush Matt




SB Sage Matt

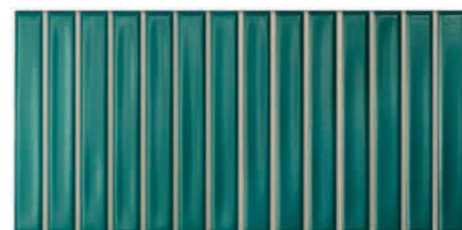

SB Teal Matt



SB Berry Matt

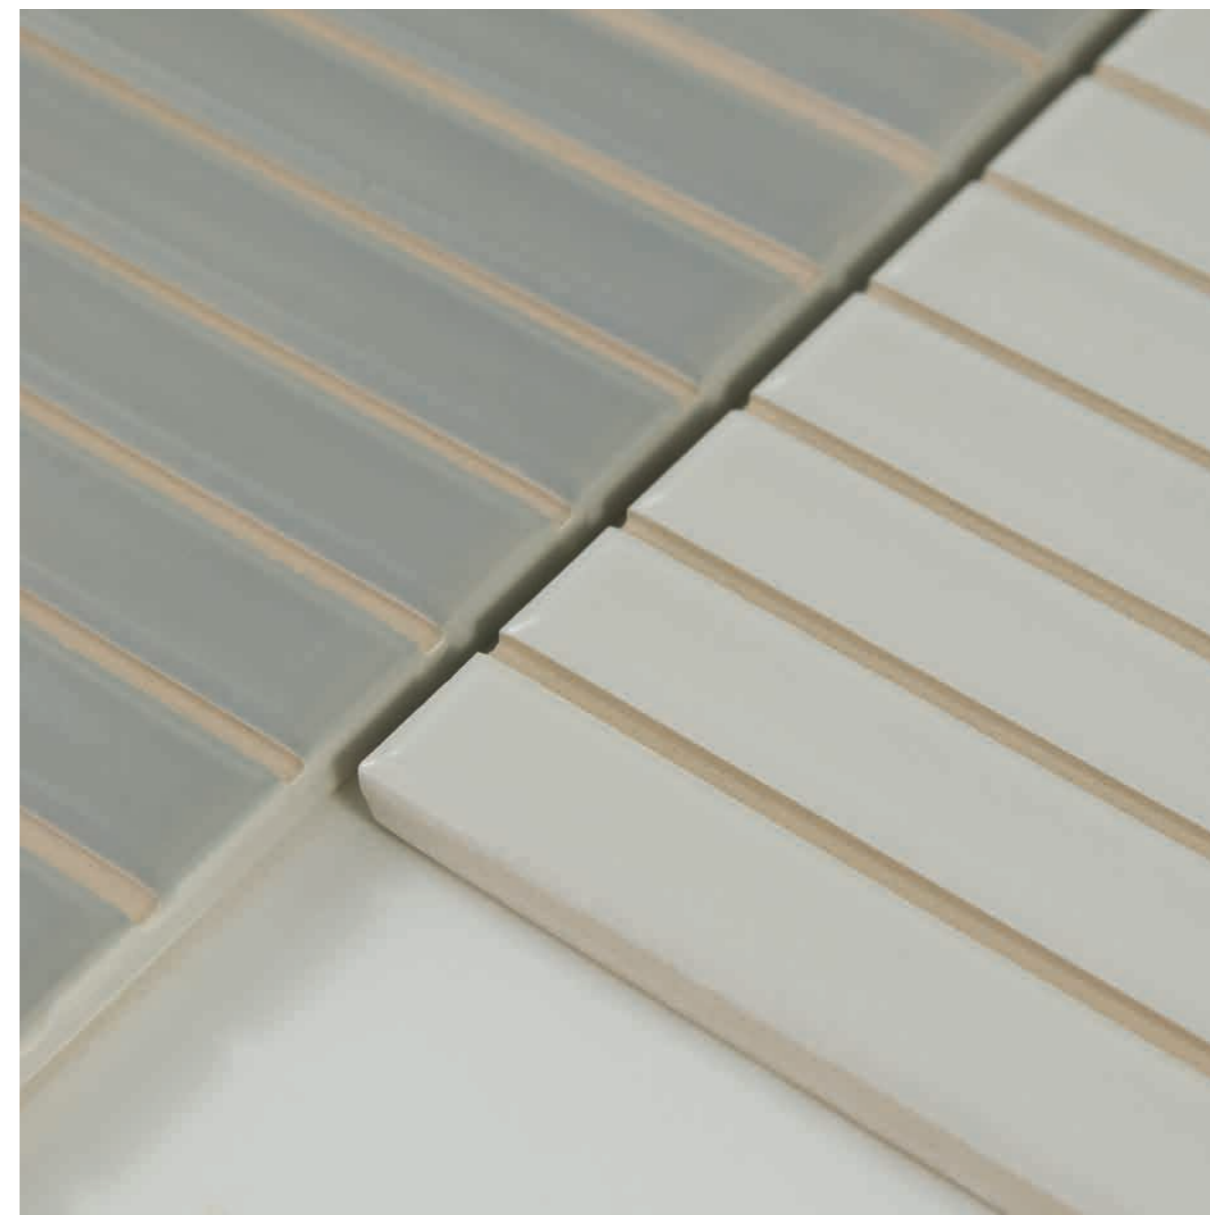

SB Grey Matt
SB White Matt

SB
12,5x25 cm / 5"x10"

W W32



SB Deep White



SB Greige




SB Mineral Grey




SB Coral



SB Fern

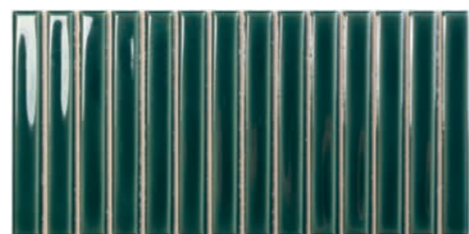


SB Royal Green

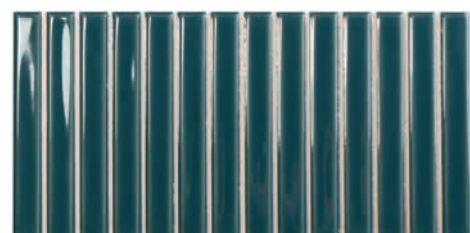

SB Peacock Blue





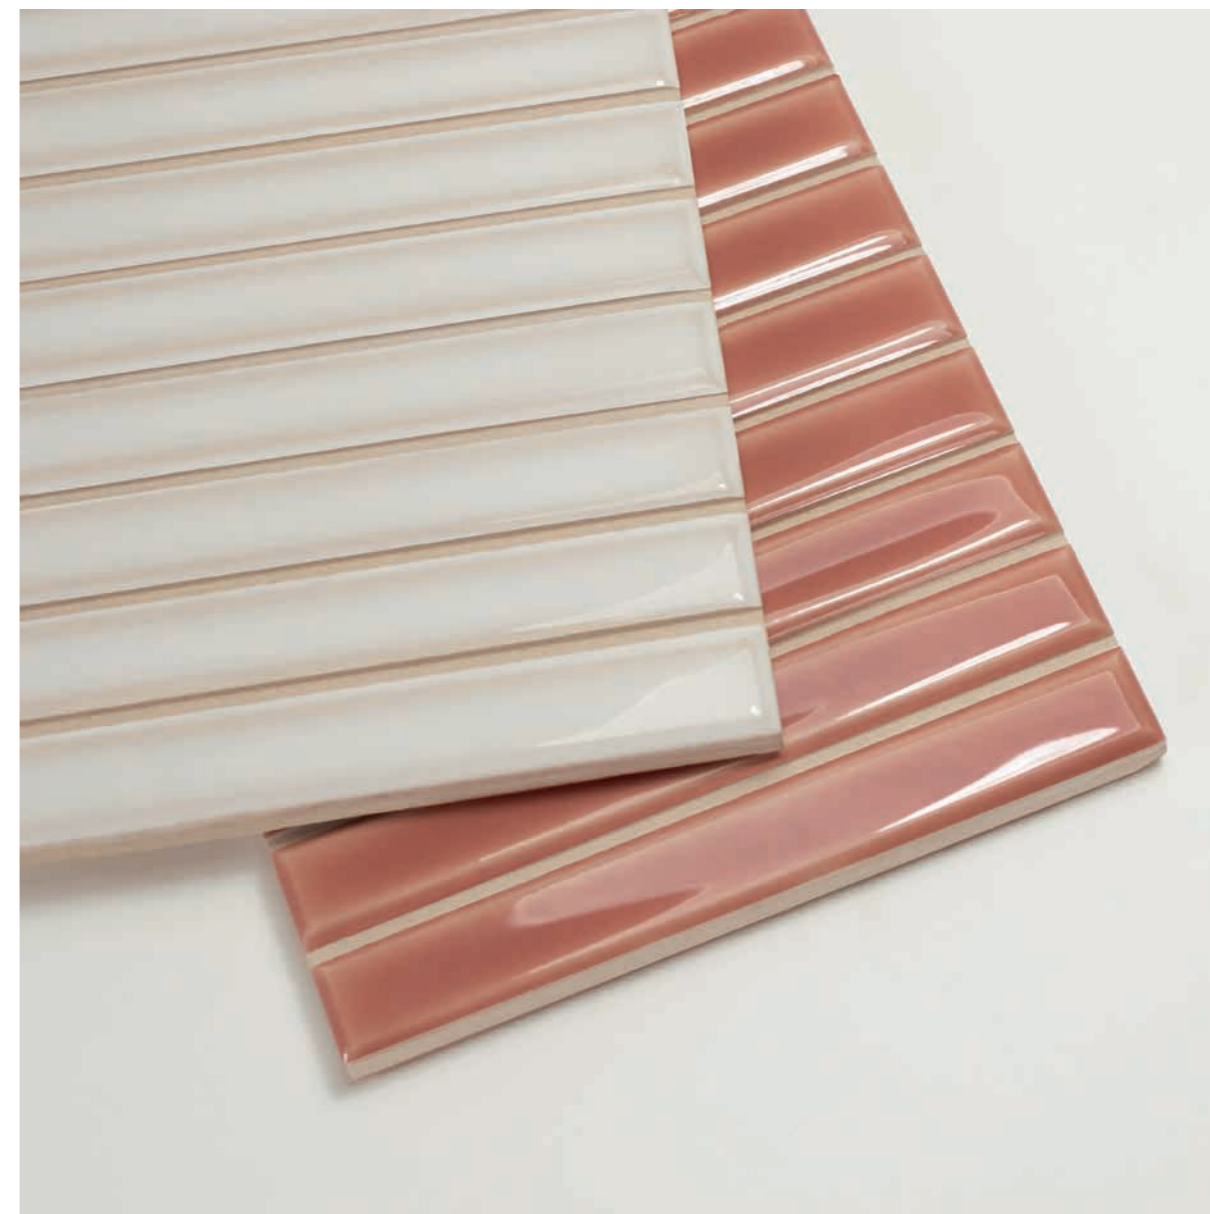



SB Ebony





SB Coral
SB Deep White

			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
SB (PORCELAIN BODY)	11,6X11,6 cm	30	9,073 kg	0,400 m ²	95	38,000 m ²
SB (WHITE BODY)	12,5x25 cm	14	7,246 kg	0,438 m ²	138	60,444 m ²

			LB 	FT2 		FT2 
Model	Format (in)	Pieces / Box	Lb/ box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
SB (PORCELAIN BODY)	4.6"x4.6"	30	20.002 lb	4.306 ft ²	95	409.07 ft ²
SB (WHITE BODY)	5"x10"	14	15.974 lb	4.715 ft ²	138	650.67 ft ²






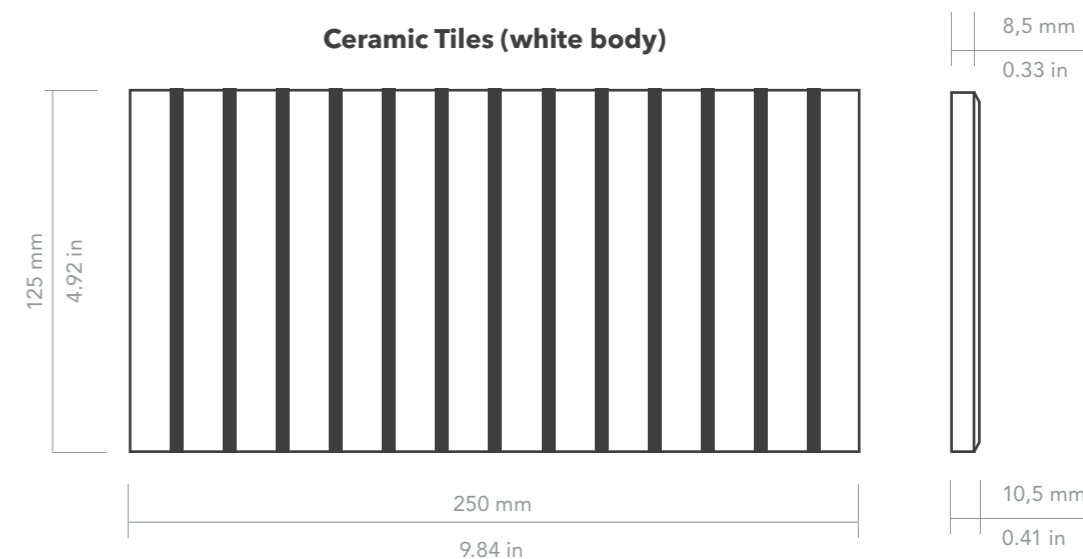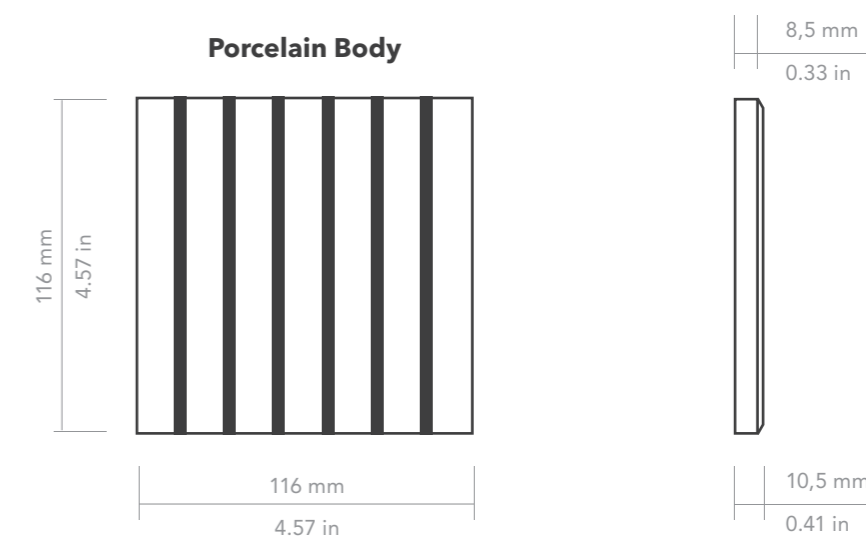


Price code - Código de tarifa









MODEL / MODELO	PRICE CODE / CODIGO TARIFA
SB BISCUIT MATT, TAN MATT & WHITE GLOSS	W32
SB TURQUES GLOSS, HONEY GLOSS, OLIVE GLOSS, TEAL GLOSS & INDIGO GLOSS	W41
SB WHITE MATT, SAND MATT, GREY MATT, BLUSH MATT, SAGE MATT, TEAL MATT & BERRY MATT	W32
SB DEEP WHITE, GREIGE, MINERAL GREY, CORAL, FERN, ROYAL GREEN, PEACOCK BLUE & EBONY	W32



WARNING! ;ATENCIÓN!

The size of the piece may vary depending on the colour. We do not recommend using compositions that mix different colours.
 El tamaño de la pieza puede variar dependiendo del color. No recomendamos utilizar composiciones que mezclen diferentes colores.

Porcelain tiles with water absorption B Ia ≤ 0,5% for interior and exterior floors and walls. Baldosas cerámicas prensadas en seco con absorción de agua B Ia ≤ 0,5% para suelos y paredes interiores y exteriores.		
FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA
 Dimensional Features	116 mm +/- 0,6% x 116 mm +/- 0,6%	UNE-EN ISO 10545-2:1998
 Water absorption	≤ 0,5%	UNE-EN ISO 10545-3:1997
 Modulus of rupture and breaking strength	Minimum 35 N/mm ² Individual Minimum 32 N/mm ²	UNE-EN ISO 10545-4:2012
 Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
 Household products resistance	GA	UNE-EN ISO 10545-13:1998
 Chemical resistance	GHA (Matt & White Gloss) GLB (Gloss) GHB (Gloss)	UNE-EN ISO 10545-13:1998
 Stain resistance	5	UNE-EN ISO 10545-14:1998
 Porcelain Body	-	

Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%) Características técnicas para las baldosas cerámicas prensadas en seco del grupo BIII (Eb >10%)		
FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA
 Dimensional Features	125 mm +/- 0,75 mm x 250 mm +/- 0,75mm	UNE-EN ISO 10545-2:1998
 Water absorption	>10%	UNE-EN ISO 10545-3:1997
 Modulus of rupture and breaking strength	Thickness ≥ 7,5 mm mínimo 12 N/mm ² Thickness < 7,5 mm mínimo 15 N/mm ²	UNE-EN ISO 10545-4:2012
 Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
 Household products resistance	GA	UNE-EN ISO 10545-13:1998
 Chemical resistance	GHA	UNE-EN ISO 10545-13:1998
 Stain resistance	5	UNE-EN ISO 10545-14:1998
 White Body	-	



WARNING! ¡ATENCIÓN!

To ensure correct alignment of the joints, we recommend that all pieces be placed in the same direction. To do this, on the back of the piece there is an arrow that indicates the orientation of the piece.

Para garantizar la correcta alineación de las juntas, recomendamos que todas las piezas se coloquen en el mismo sentido. Para ello, en el reverso de la pieza hay una flecha que indica la orientación de la pieza.

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore, all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems.

For an optimal result that enhances the mosaic effect, we recommend using 1,5 mm (0.06") of joint, as well as a joint color that contrasts with the tone of the piece.

We do not recommend using a grout color similar to the piece.

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water. The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder detergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

WARNING!

Due to the glaze specifications of colours: SB Turques Gloss, SB Honey Gloss, SB Olive Gloss, SB Teal Gloss and SB Indigo Gloss; it is strongly recommended to avoid using these products on kitchen countertops or any other surface where the tiles might be in contact with food.

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con morteros tradicionales no garantiza una buena adhesión.

Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías.

Para un resultado óptimo que realce el efecto mosaico recomendamos usar 1,5 mm de junta, así como un color de junta que contraste con el tono de la pieza.

No recomendamos utilizar un color de rejunte similar a la pieza.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.

¡ATENCIÓN!

Debido a las características de los colores SB Turques Gloss, SB Honey Gloss, SB Olive Gloss, SB Teal Gloss y SB Indigo Gloss; se recomienda encarecidamente evitar el uso de estos productos en encimeras de cocina o cualquier otra superficie donde los azulejos toquen directamente los alimentos.